

# CA 1310

## Integrating Sound Level Meter




Measurement of the equivalent continuous sound level (Leq)

Recording of up to 64,000 measurement points with data processing software supplied as standard

Wide backlit screen with digital and bargraph display

Microphone for remote use (extension accessory)

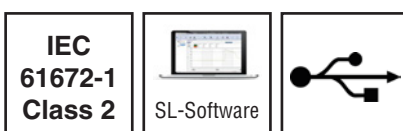

*Measure up*



# THE CA 1310 INTEGRATING SOUND LEVEL METER

can be used very simply to measure noise in the environment. Outdoors, in a factory, in an office, whatever the location, the CA 1310 will tell you instantly whether the sound levels around you are acceptable. The ergonomic design of its casing offers excellent grip and the large backlit screen is very easy to read.

## SPECIFICATIONS

## CA 1310

Microphone	1/2" electret-condenser microphone
Measurement range	30.0 to 130.0 dB
Frequency range	20 Hz to 8 kHz
Accuracy (in reference conditions at 94 dB, 1 kHz)	± 1 dB
Frequency weighting	A / C
Time weighting	FAST: 125 ms / SLOW: 1 second

## FUNCTIONS

Measurement modes	SPL (sound pressure level), Leq (equivalent continuous sound level), MaxL (maximum sound level), MinL (minimum sound level)
Leq integration time	<b>As required among the following values:</b> 10 sec, 1 min, 5 min, 10 min, 15 min, 30 min, 1 hr, 8 hrs, 24 hrs
Recording	64,000 points
Time display and time/date-stamping	Yes
Min/Max	Yes

## DISPLAY

Digital display	0.1 dB resolution / Display refresh rate: 500 ms
Bargraph	50 segments, display refresh rate: 50 ms
Backlighting	Yes

## POWER SUPPLY

Batteries	1.5V AA x 4
Battery life	More than 60 hours

## PHYSICAL SPECIFICATIONS


Interfaces	Micro USB for data transfer or use of mains power supply Analogue AC / DC Jack output: AC output: 1 Vrms at full scale / DC output: 10 mV / dB
Tripod insert	Yes
Dimensions / weight	262 x 75 x 39 mm / 390 g (with batteries)
Ingress protection	IP 40

## ENVIRONMENTAL SPECIFICATIONS

Operating temperature	0 to 40 °C	<b>Real-time monitoring of the measurements with SL-Software PC software</b>
Storage temperature	-10 to +60 °C	
Humidity	10 to 90 %RH	

## GENERAL

Compliance	IEC 61672-1 Class 2 / ANSI S1.4 Type 2
Warranty	2 years
SL-Software data processing software	Graphical representation or table of values - Data export - Real-time mode

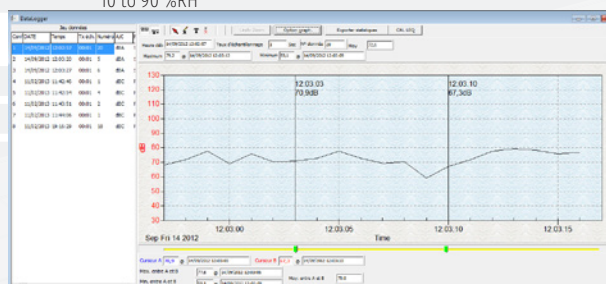

### Standard state at delivery :

- CA 1310: delivered in a hard case with batteries, foam wind-shield, software on CD-Rom, 1 male Jack socket, User's Manual, Verification Certificate.

### To order :

CA 1310 integrating sound level meter.....P01651030

### Accessories & replacement parts :

- CA 833 sound level meter calibrator.....P01185301
- Foam wind-shield.....P01102083
- 5-metre sound level meter microphone extension cable.....P01102190
- USB mains adapter (supplied with USB/µUSB cable).....P01651023
- 4 x AA/LR6 rechargeable batteries + charger.....HX0053

**FRANCE**  
**Chauvin Arnoux**  
 12, rue Sarah Bernhardt  
 92600 Asnières-sur-Seine  
 Tél : +33 1 44 85 44 85  
 Fax : +33 1 46 27 95 59  
 export@chauvin-arnoux.fr  
 www.chauvin-arnoux.com

**UNITED KINGDOM**  
**Chauvin Arnoux Ltd**  
 Unit 1 Nelson Ct, Flagship Sq, Shaw Cross Business Pk  
 Dewsbury, West Yorkshire - WF12 7TH  
 Tel: +44 1924 460 494  
 Fax: +44 1924 455 328  
 info@chauvin-arnoux.co.uk  
 www.chauvin-arnoux.com

**MIDDLE EAST**  
**Chauvin Arnoux Middle East**  
 P.O. BOX 60-154  
 1241 2020 JAL EL DIB - LEBANON  
 Tel: +961 1 890 425  
 Fax: +961 1 890 424  
 camie@chauvin-arnoux.com  
 www.chauvin-arnoux.com

